


KEL-DP round Cable Entry Plates



IP65

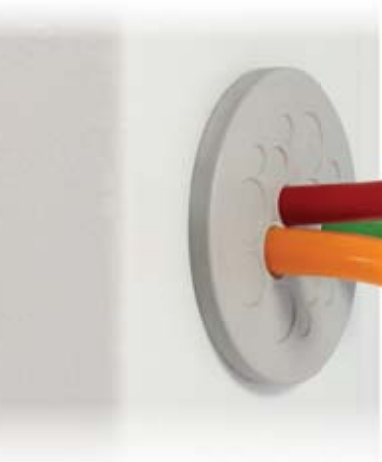

Also available in black.



Membrane on front



Special fixing ribs ensure a centered fit.

Type	Order No. Type A	Order No. Type B	Number of cables	Cut-out	External diameter DA	PU
------	------------------	------------------	------------------	---------	----------------------	----

Product Description

2

KEL-DP entry plates are designed for routing cables without connectors.

The KEL-DP products are a cost saving alternative to traditional cable glands. Ideal for high volume applications where conventional cable glands would normally be used. Simply make a small hole in the thin membrane and push the cables through. The KEL-DP round provides protection IP65 / NEMA Type 12.

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

A special rib ensures a centered fit in the cut-outs.

Advantages & Benefits

- Fast and easy assembly, no tools required
- High cable density
- Cost-effective
- For wall thickness 1.5 - 4 mm
- Hygienic design - free of dirt-collecting recesses

KEL-DP 25 4	<input type="checkbox"/> 43533 <input checked="" type="checkbox"/> 50533	-	4× max. 8 mm	ø 25 mm	32 mm	10
KEL-DP 25 6	<input type="checkbox"/> 43531 <input checked="" type="checkbox"/> 50531	-	4× max. 5.2 mm 2× max. 9.4 mm	ø 25 mm	32 mm	10
KEL-DP 32 10	<input type="checkbox"/> 43532 <input checked="" type="checkbox"/> 50532	<input type="checkbox"/> 43560 <input checked="" type="checkbox"/> 50560	6× max. 5.2 mm 2× max. 6.4 mm 2× max. 9.4 mm	ø 32 mm	38 mm	10
NEW KEL-DP 40 9	<input type="checkbox"/> 43536	<input type="checkbox"/> 43561	8× max. 9.5 mm 1× max. 11.3 mm	ø 40 mm	50 mm	10
NEW KEL-DP 40 16	<input type="checkbox"/> 43537	<input type="checkbox"/> 43563	2× max. 5.3 mm 10× max. 6.3 mm 2× max. 9.5 mm 2× max. 11.3 mm	ø 40 mm	50 mm	10
NEW KEL-DP 40 17	<input type="checkbox"/> 43538	<input type="checkbox"/> 43565	1× max. 4 mm 16× max. 7.2 mm	ø 40 mm	50 mm	10

* Only valid for gray product types